



PCT / IB 0 3 / 0 3 1 9 7

22 JUL 2003



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

16 May 2003

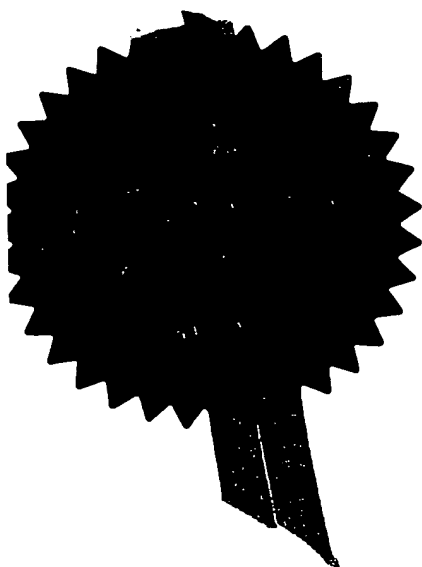

1/77

Patents Form 1

THE PATENT OFFICE
C
- 2 AUG 2002
NEWPORT

Patents Act 1977
(Rule 16)

The
Patent
Office

Request for grant of a patent
(See notes on the back of this form. You can
also get an explanatory leaflet from the Patent
Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference PHGB 020122
2. Patent application number
(The Patent Office will fill in this part) 0217932.3
3. Full name, address and postcode of the or of
each applicant (underline all surnames) 02 AUG 2002
KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it) 04419294001

If the applicant is a corporate body, give the
country/state of its incorporation

THE NETHERLANDS

4. Title of the invention HIGH FREQUENCY MODULE

5. Name of your agent (if you have one) KEVIN JAMES SCOTT
- "Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode) Philips Intellectual Property & Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it) 04688914002

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number
- | Country | Priority Application number | Date of filing |
|---------|-----------------------------|----------------|
|---------|-----------------------------|----------------|

7. If this application is divided or otherwise
derived from an earlier UK application, give
the number and the filing date of the earlier
application
- | Number of earlier application | Date of filing
(day/month/year) |
|-------------------------------|------------------------------------|
|-------------------------------|------------------------------------|

8. Is a statement of inventorship and of right to
grant of a patent required in support of this
request? (Answer "Yes" if:
- a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an
applicant, or
c) any named applicant is a corporate body.
See note (d)) YES

Patents form 1

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

| | |
|-------------|-------------------|
| Description | 8 |
| Claims(s) | 3 |
| Abstract | 1 |
| Drawings | 2 <i>per line</i> |


10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents
Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)
Request for substantive examination
(*Patents Form 10/77*)
Any other documents
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

1st August 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5281

K J SCOTT

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.

DESCRIPTION

HIGH FREQUENCY MODULE

5 The present invention relates to a high frequency module having particular, but not exclusive, application in a multi-mode radios used for example in cellular telephones.

10 A multi-mode radio used in cellular telephones may have the capability to operate in accordance with several different standards/frequency bands, such as GSM, DCS (Digital Cellular System 1800) and PCS (Personal Digital Cellular). Since such radios have one antenna to which is coupled several transmitter/receiver front ends, it is necessary to be able to select one front end in preference to the others. Typically band pass filters and high frequency
15 mode switches, for example PIN diodes, are used for selecting one front end from the several available. Such switches are lossy and require a discrete amount of PCB (Printed Circuit Board) space.

 An example of such a circuit is shown in Figure 1 of the accompanying drawings. In this circuit five mode switches SW1 to SW5 comprise PIN diodes.
20 The illustrated circuit relates to an architecture for receiving/transmitting signals complying with the GSM, DCS and PCS standards. An antenna 10 is coupled to a duplexer filter 12 which comprises a low pass filter 14 for passing GSM frequencies but blocking DCS and PCS frequencies and a high pass filter 16 for passing DCS and PCS frequencies and blocking GSM frequencies.

25 The GSM RF front end architecture comprises a power amplifier 18 having an output coupled to a first mode switch SW1 and by an inductance L1 to a power supply line 24. The mode switch SW1 is coupled to the low pass filter 14 and to one end of a transmission line TXL1. The other end of the transmission line TXL1 is coupled to a mode switch SW2 and to an input of a receiver SAW band pass filter RXF1. An output of the band pass filter RXF1 is
30 coupled to an input of a low noise amplifier LNA1.

The DCS and PCS RF front ends are coupled to the high pass filter 16. A common DCS/PCS transmitter comprises a power amplifier 20 having an output coupled to a mode switch SW3 and by way of an inductance L2 to a power supply line 24. The cathode of the mode switch SW3 is coupled to the filter 16. The front ends of the DCS and PCS receivers are separate. An output of the filter 16 is coupled to a mode switch SW4 and to one end of a length of transmission line TXL2. The mode switch SW4 is coupled to one side of a PCS receiver SAW filter and to an inductance L3 which is coupled to the power supply line 24. An output of the SAW filter RXF2 is coupled to the PCS low noise amplifier LNA2. The other end of the length of transmission line TXL2 is coupled to a mode switch SW5 and to a DCS receiver SAW filter RXF3. An output of the SAW filter RXF3 is coupled to a DCS low noise amplifier LNA3.

All the filters have an input impedance of 50 Ω whereas the input impedance of low noise amplifiers is typically 200 Ω . Matching of the different impedances may be achieved by the filters or by impedance transformation between the filter and its respective low noise amplifier. A particular disadvantage of this architecture is that a relatively high current, typically of the order of 10mA is consumed by the mode switch SW4 in the PCS listening/standby mode, thereby lowering battery life. Ideally there should not be any current drain in the listening/standby mode.

European Patent Specification EP 1 168 650 A1 discloses a high frequency switch module for switching between a DCS/PCS transmitter and a DCS receiver and a PCS receiver. An antenna is coupled to a duplexer comprising a low pass filter coupled to a GSM circuit and a high pass filter coupled by way of a change-over switch to a DCS/PCS transmitter front end and to a branching circuit having branches for a DCS receiver front end and a PCS receiver front end, respectively. Each of the branches respectively comprises a phase shifter coupled to the input of a DCS or PCS filter, as appropriate. Each phase shifter is constituted by a transmission line having an actual length of about $\lambda/10$ to $\lambda/4$ at a respective frequency of interest. Viewed from the common terminal the impedance characteristics of the respective branches are that they are substantially open state in a reception band of the

other branch. Whilst this cited module has fewer mode switches compared to Figure 1, the use of transmission line as phase shifters is subject to undesired losses and it is necessary to provide an impedance transformer between the respective filter and low noise amplifier input. Additionally the open state
5 impedance presented by the blocking branch is such that not all the signal goes to the other branch.

An object of the present invention is to produce a multi-mode radio module which will operate more effectively than the cited module.

10 According to one aspect of the present invention there is provided a multi-mode radio module comprising a terminal for connection to signal propagating and receiving means, a transmitting branch coupled to the terminal, and a branching circuit coupled to the terminal, the branching circuit comprising at least a first and a second branch for receiving signals in first and
15 second frequency bands, respectively, each of the first and second branches comprising, respectively, a phase shifting circuit, a band pass filter coupled to the phase shifting circuit, the bandwidth of the filter being selected to pass a wanted signal in one of the first and second frequency bands but reject an unwanted signal in the other of the second and first frequency bands, and a
20 low noise amplifier coupled to an output of the band pass filter, wherein each of the phase shifting circuits is impedance transforming.

According to another aspect of the present invention there is provided a multi-mode radio comprising signal propagating and receiving means, means for modulating signals to be transmitted, means for demodulating received
25 signals and a multi-mode radio module comprising a transmitting branch coupled to the signal propagating and receiving means, the modulating means being coupled to a signal input of the transmitting branch, and a branching circuit coupled to the signal propagating and receiving means, the branching circuit comprising at least a first and a second branch for receiving signals in
30 first and second frequency bands, respectively, each of the first and second branches comprising, respectively, a phase shifting circuit, a band pass filter coupled to the phase shifting circuit, the bandwidth of the filter being selected

to pass a wanted signal in one of the first and second frequency bands but reject an unwanted signal in the other of the second and first frequency bands, and a low noise amplifier coupled to an output of the band pass filter, the respective low noise amplifiers being coupled to the demodulating means,
5 wherein each of the phase shifting circuits is impedance transforming.

By making the phase shifting circuits upwardly impedance transforming the respective receiver front end has a more efficient configuration. The beneficial features of impedance transforming are that the impedance can be transformed from the antenna impedance of 50 Ω to the input impedance of
10 the low noise amplifier, typically 200 Ω , thereby avoiding the need to provide a separate impedance matching stage between the output of the filter and the low noise amplifier or having to make the filter impedance transforming. Also the phase shifting circuits present a significantly better open state, compared to the cited circuit, which means that more signal goes to the wanted branch.
15 Further the filter when fabricated as a Bulk Acoustic Wave (BAW) filter or Surface Acoustic Wave filter will require approximately a quarter of the area of a PCB and have fewer losses compared to a BAW or SAW having an input impedance of 50 Ω .

20 The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic circuit diagram of a multi-mode radio module having a plurality of mode switches, and

Figure 2 is a block schematic diagram of a multi-mode radio/radio
25 module made in accordance with the present invention.

In the drawings the same reference numerals have been used to identify corresponding features.

In the interests of brevity as Figure 1 has been described already in the
30 preamble of this specification it will not be described again.

The multi-mode radio shown in Figure 2 is intended for receiving/transmitting signals complying with the GSM, DCS and PCS

standards. An antenna 10 is coupled to a terminal 11 of a multi-mode radio module 22. The terminal is coupled to a duplexer filter 12 which comprises a low pass filter 14 for passing GSM frequencies but blocking DCS and PCS frequencies and a high pass filter 16 for passing DCS and PCS frequencies and blocking GSM frequencies.

The GSM RF front end architecture comprises a power amplifier 18 having an output coupled to a first mode switch SW1 and by an inductance L1 to a power supply line 24. The first mode switch SW1 is coupled to the low pass filter 14 and to one end of a $\lambda/4$ transmission line TXL1. The other end of the transmission line TXL1 is coupled to a mode switch SW2 implemented as a PIN diode and to an input of a receiver SAW band pass filter RXF1. An output of the band pass filter RXF1 is coupled to an input of a low noise amplifier LNA1.

A signal source 26 is coupled to a GSM modulator 28 having an output coupled to a terminal 30 which is coupled to the power amplifier 18. A received GSM signal provided by the low noise amplifier LNA1 is supplied to a demodulator 38 by way of a terminal 36. An output of the demodulator 38 is supplied to an output device 40, such as an acoustic transducer.

The DCS and PCS RF front ends are coupled to the high pass filter 16 of the duplexer 12. A common DCS/PCS transmitter comprises a signal source 42 coupled to an input of a DCS/PCS modulator 44 which is coupled by way of a terminal 46 to a power amplifier 20 having an output coupled to a mode switch SW3 implemented as a PIN diode and by way of an inductance L2 to the power supply line 24. The cathode of the mode switch SW3 is coupled to the filter 16.

The RF front ends of the DCS and PCS receivers form separate branches of a branching circuit which is connected by way of a $\lambda/4$ transmission line TXL2 to the filter 16. The transmission line TXL2 presents an open circuit and avoids loading the DCS/PCS transmitter. The PCS branch comprises an impedance transforming phase shifting circuit PS1 consisting of a series capacitor C1 and a shunt inductance L3. An output of the phase shifting circuit PS1 is connected to a band pass filter RXF2 which may be a

BAW or SAW filter. The filter RXF2 is coupled to the PCS low noise amplifier LNA2. The low noise amplifier LNA2 is coupled by way of a terminal 48 to a PCS demodulator 50 to which a suitable output stage 52 is connected.

5 The DCS branch comprises an impedance transforming phase shifting circuit PS2 consisting of a series capacitor C2 and a shunt inductance L4. An output of the phase shifting circuit PS2 is connected to a band pass filter RXF3 which may be a BAW or SAW filter. The filter RXF3 is coupled to the DCS low noise amplifier LNA3. The low noise amplifier LNA3 is coupled by way of a terminal 54 to a DCS demodulator 56 to which a suitable output stage 58 is
10 connected.

The other end of the length of transmission line TXL2 is coupled to a mode switch SW5 implemented as a PIN diode.

Ignoring the GSM part of the module, when the DCS/PCS transmitter branch wants to transmit the mode switches SW3 and SW5 are conductive so
15 that the voltage on the power supply line 24 is coupled to the DCS/PCS transmitter. No current is drawn by the DCS and PCS receiver branches because they are isolated by the conduction of the mode switch SW5. In the receive mode the mode switches SW3 and SW5 are non-conductive so that a received signal is applied to both branches of the branching circuit by way of
20 the transmission line TXL2. The two RF receive front ends can be connected together without the necessity of a mode switch, such as the mode switch SW4 in Figure 1, by making use of the out-of-band responses of the band pass filters RXF2 and RXF3 and by phase shifting the response of each of these filters so that they appear as an open circuit at the frequency of the other
25 band. Consequently in the listening state the PCS receiver is not causing current to be drained. The phase shifts produced by the phase shifting circuits PS1 and PS2 are made impedance transforming so that their input impedance is 50Ω to match that of the transmission line TXL2 and their output impedance is 200Ω to match the input impedance of the respective band pass filter RXF2,
30 RXF3. It is inherently better to impedance transform before the respective filter RXF2, RXF3 since these filters are electrically long. Since the output impedance of the impedance transforming circuit is relatively high it enables

these filters to be made of physically smaller resonators compared to an architecture with non impedance transforming phase shifting circuits. This means, in the case of BAW filters, that the area scales down by a factor equal to the impedance increase. This is also true of SAW filters, although there is rather less flexibility, since only one dimension can be used. Thus, a factor of 4 means that a saving of the order of 75% of the area of a printed circuit board can be made (excluding the interconnect area). The upward impedance transformation is effected by increasing the values of the shunt inductances L3, L4 and altering the values of the capacitors C1, C2. Another feature is that the band pass filters exhibit lower losses in the chosen architecture and a better match to typical low noise amplifier impedances thereby avoiding the need for separate impedance matching after the filter stages. The reason for this is that the lossy parasitic capacitance scales with device size, that is, loss remains unchanged at different filter impedance values. The series resistance, however, remains the same. Thus, the series losses reduce as the filter impedance increases. With SAW devices it is likely that the series resistance would reduce as the filter impedance is increased. This will reduce losses further.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use multi-mode radios/modules and component parts therefor and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in

any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any
5 further application derived therefrom.

CLAIMS

1. A multi-mode radio module comprising a terminal for connection to signal propagating and receiving means, a transmitting branch coupled to the terminal, and a branching circuit coupled to the terminal, the branching circuit comprising at least a first and a second branch for receiving signals in first and second frequency bands, respectively, each of the first and second branches comprising, respectively, a phase shifting circuit, a band pass filter coupled to the phase shifting circuit, the bandwidth of the filter being selected to pass a wanted signal in one of the first and second frequency bands but reject an unwanted signal in the other of the second and first frequency bands, and a low noise amplifier coupled to an output of the band pass filter, wherein each of the phase shifting circuits is impedance transforming.
2. A radio module as claimed in claim 1, characterised in that each of the band pass filters is a BAW filter.
3. A radio module as claimed in claim 1, characterised in that each of the band pass filters is a SAW filter.
4. A radio module as claimed in claim 1, 2 or 3, characterised in that each of the phase shifting circuit comprises a series capacitance and a shunt inductance, the values of the series capacitance and the shunt inductance being such as to provide a predetermined impedance transformation between that of the signal propagating and receiving means and the respective band pass filter.
5. A radio module as claimed in any one of claims 1 to 4, characterised in that the branching circuit is coupled to the terminal by way of a length of transmission line.

6. A radio module as claimed in claim 5, characterised by the transmitting branch having a series switch coupled to the terminal and the branching circuit having a shunt switch coupled to an end of the transmission line remote from the terminal.

5

7. A radio module as claimed in any one of claims 1 to 6, characterised in that a duplexer is coupled to the terminal, in that the transmitting and the branching circuit are coupled to a port of the duplexer for passing signals having frequencies lying in a first bandwidth and in that a further port is coupled to a further branch for processing signals having frequencies lying in a second bandwidth.

10

8. A multi-mode radio comprising signal propagating and receiving means, means for modulating signals to be transmitted, means for demodulating received signals and a multi-mode radio module comprising a transmitting branch coupled to the signal propagating and receiving means, the modulating means being coupled to a signal input of the transmitting branch, and a branching circuit coupled to the signal propagating and receiving means, the branching circuit comprising at least a first and a second branch for receiving signals in first and second frequency bands, respectively, each of the first and second branches comprising, respectively, a phase shifting circuit, a band pass filter coupled to the phase shifting circuit, the bandwidth of the filter being selected to pass a wanted signal in one of the first and second frequency bands but reject an unwanted signal in the other of the second and first frequency bands, and a low noise amplifier coupled to an output of the band pass filter, the respective low noise amplifiers being coupled to the demodulating means, wherein each of the phase shifting circuits is impedance transforming.

15

20

25

30

9. A radio as claimed in claim 8, characterised in that each of the phase shifting circuits comprises a series capacitance and a shunt inductance, the value of the series capacitor and the shunt inductance being such as to

provide a predetermined impedance transformation between that of the signal propagating and receiving means and the respective band pass filter.

10. A radio as claimed in claim 9, characterised by the transmitting
5 branch having a series switch coupled to the terminal and the branching circuit having a shunt switch coupled to one end of a quarter wavelength transmission line, the other end of the transmission line being coupled to the terminal.

10 11. A radio as claimed in any one of claims 8 to 10, characterised in that a duplexer is coupled to the terminal, in that the transmitting and the branching circuit are coupled to a port of the duplexer for passing signals having frequencies lying in a first bandwidth and in that a further port is coupled to a further branch for processing signals having frequencies lying in a
15 second bandwidth.

12. A multi-mode radio module constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

20

13. A multi-mode radio constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

25

ABSTRACT**HIGH FREQUENCY MODULE**

5 A multi-mode radio module (22) comprises a terminal (11) for connection to an antenna (10). A transmitting branch (DCS/PCS) and a branching circuit are coupled to the terminal (11). The branching circuit comprises at least a first and a second branch for receiving signals in first and second frequency bands (DCS, PCS), respectively. Each of the first and
10 second branches comprise, respectively, a phase shifting circuit (PS1, PS2), a BAW or SAW band pass filter (RXF2, RXF3) coupled to the phase shifting circuit, the bandwidth of the filter being selected to pass a wanted signal in one of the first and second frequency bands but reject an unwanted signal in the other of the second and first frequency bands, and a low noise amplifier
15 (LNA2, LNA3) coupled to an output of the band pass filter. The response of each of the band pass filters (RXF2, RXF3) is phase shifted to present an open circuit at the wanted frequency in the other branch. Each of the phase shifting circuits (PS1, PS2) is impedance transforming so that higher impedance filters can be used.

20

(Figure 2)

1/2

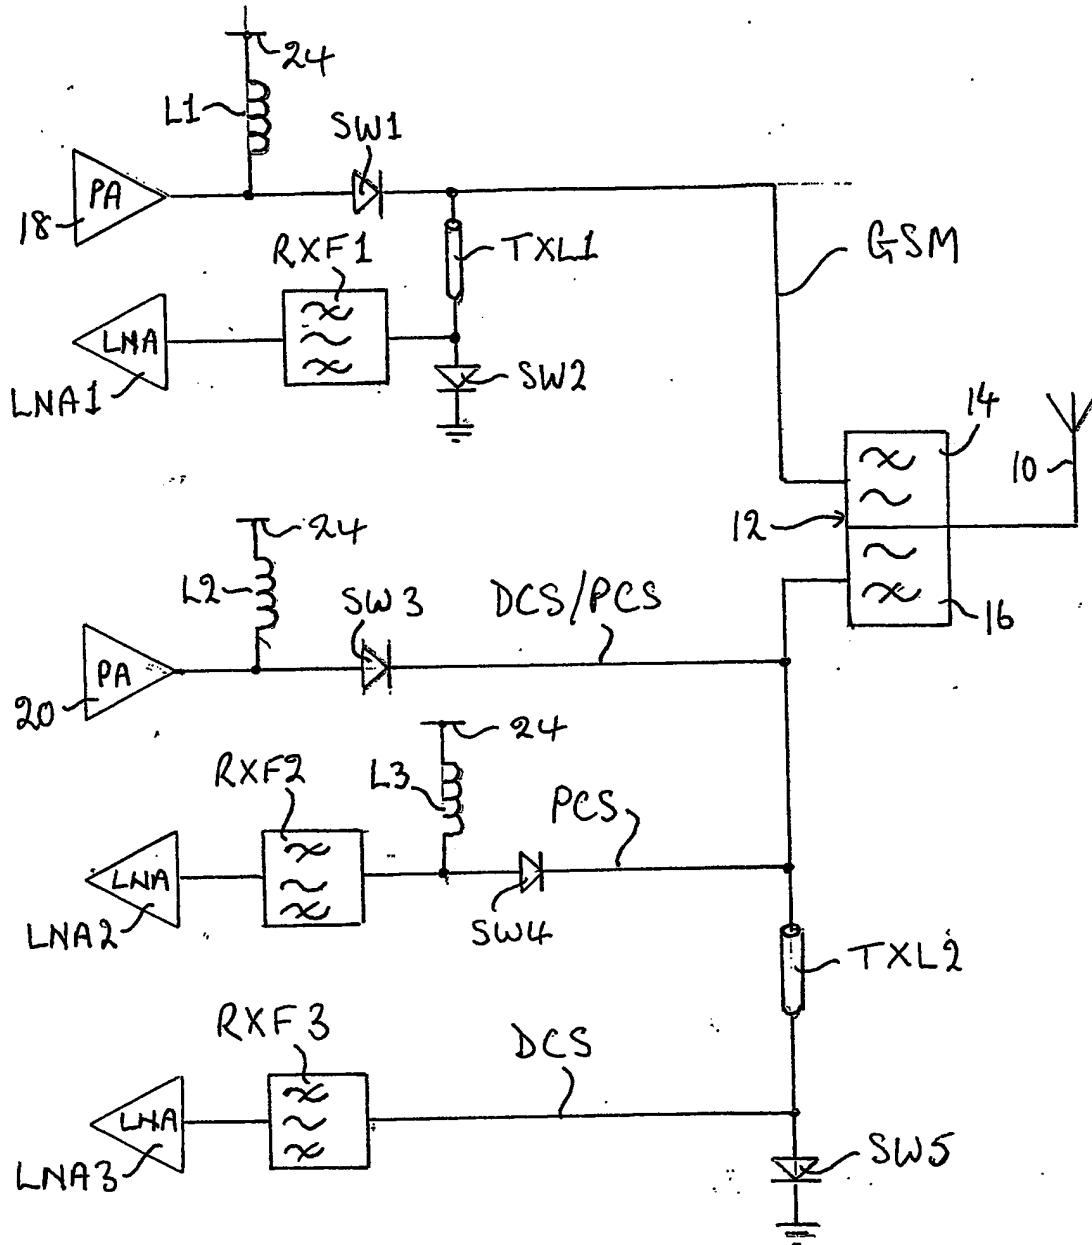


Fig. 1

BEST AVAILABLE COPY

2/2

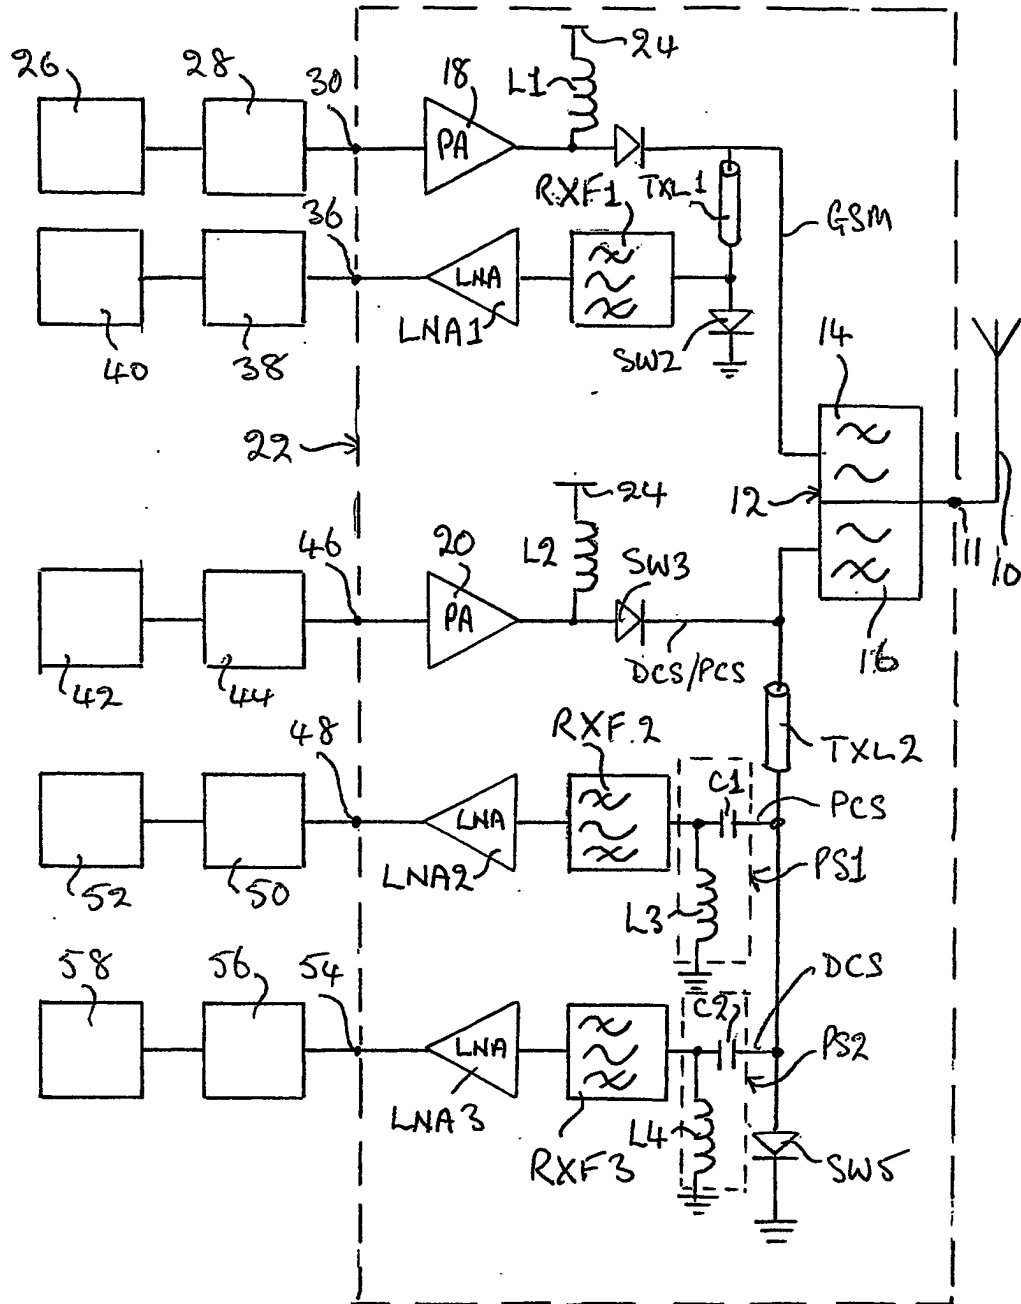


Fig. 2.

BEST AVAILABLE COPY